

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number  
**WO 2004/055442 A2**

(51) International Patent Classification<sup>7</sup>: **F24F**

(21) International Application Number:  
PCT/KR2002/002385

(22) International Filing Date:  
18 December 2002 (18.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-Dong, Yongsungpo-Gu, 150-010 Seoul (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHOI, Dae-Hwan** [KR/KR]; Hwamyeongjugong Apt. 37-210, Hwamyeong-Dong, Buk-Gu, 616-783 Busan (KR). **LEE, Kyungsoo** [KR/KR]; 705-17, Sujeong 3-Dong, Dong-Gu, 601-817 Busan (KR). **EOM, Yoon-Seob** [KR/KR]; Woosong Apt. 101-1006, Namyang-Dong, 641-091 Changwon, Gyeongsangnam-Do (KR). **KOO,**

**Jeong-Hwan** [KR/KR]; 1346-22, 18/4, Daeyeon 5-Dong, Nam-Gu, 608-808 Busan (KR). **RYU, Jun-Sang** [KR/KR]; Hanil Apt. 505-1101, Juyeop 2-Dong, Ilsan-Gu, 411-372 Goyang, Gyeonggi-Do (KR).


(74) Agent: **PARK, Jang-Won**; Jewoo Bldg. 5th Floor 200, Nonhyun-Dong, Gangnam-Ku, 135-010 Seoul (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: AIR CONDITIONER

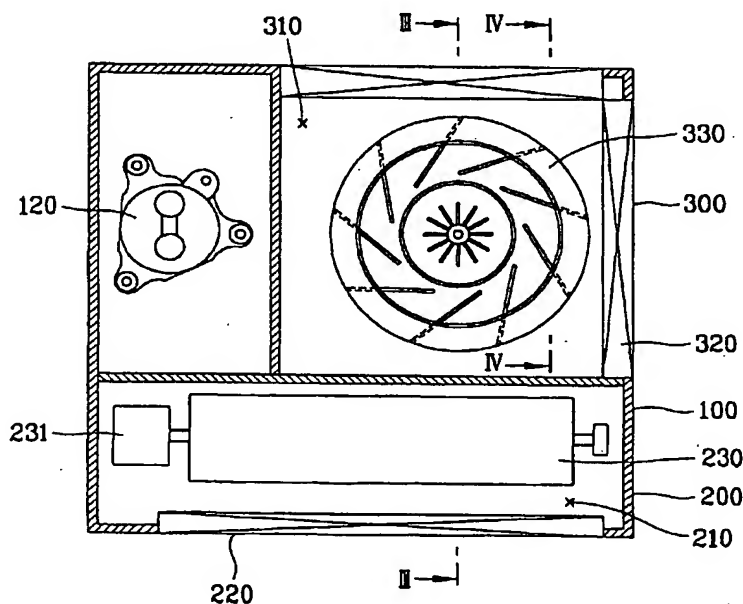

(57) Abstract: In an air conditioner, the air conditioner includes a casing having an indoor space region and an outdoor space region; an indoor unit installed in the indoor space region, sucking air and cooling the sucked air through a first heat exchanger; an outdoor unit installed in the outdoor space region, sucking air and releasing heat of the air to the outside through a second heat exchanger; and a turbo fan installed in the outdoor space region for generating air flows so as to flow air to the second heat exchanger.

WO 2004/055442 A2



**Published:**

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

4/PRTS

10/539554

JC17 Rec'd PCT/PTO 16 JUN 2005

AIR CONDITIONERTECHNICAL FIELD

The present invention relates to an air conditioner.

5

BACKGROUND ART

An air conditioner is for adjusting temperature, humidity, air current in a certain space so as to be appropriate for activity of human being and removing dust, etc. from air simultaneously.

10        The air conditioner consists of an indoor unit for cooling/heating indoor air and an outdoor unit for discharging/absorbing heat generated in the indoor unit to outdoors, the indoor unit and the outdoor unit can be installed separately or as one body.

      In particular, an air conditioner having an indoor unit and an  
15 outdoor unit as one body is called a single unit type air conditioner or a window type air conditioner (hereinafter, it is referred to an single unit type air conditioner).

      Figure 1 is a longitudinal-sectional view illustrating the conventional single unit type air conditioner.

20        As depicted in Figure 1, the conventional single unit type air conditioner includes a casing 10 having an indoor space region 21 and an outdoor space region 31 separately formed by a separation plate 11; a compressor 12 installed in the indoor space region 21 and compressing refrigerant into high temperature and high pressure state; an outdoor unit

30 being installed in the outdoor space region 31 and having a condenser 32 for cooling the refrigerant compressed by the compressor 12; and an indoor unit 20 installed in the indoor space region 21 and having an evaporator 22 performing heat exchange between the refrigerant  
5 condensed in the condenser 32 and indoor air.

A motor 13 is installed at the center of the separation plate 11, a fan 23 for generating an air flow is installed at a rotational shaft 13a of the motor 13 in the indoor space region 21 in order to make sucked indoor air pass the evaporator 22, and a cooling fan 33 for generating an air flow is  
10 installed at the rotational shaft 13a of the motor 13 in the outdoor space region 31 in order to make sucked outdoor air pass the condenser 32.

In general, a turbo fan is used as the fan 23, and an axial fan is used as the cooling fan 33.

In the conventional single unit type air conditioner, when power is  
15 applied, the compressor 12 compresses the refrigerant in the operation, the refrigerant compressed in the compressor 12 releases heat to the outdoor air sucked by the cooling fan 33 while passing the condenser 32, and accordingly the refrigerant is cooled.

The refrigerant cooled while passing the condenser 32 flows to the  
20 evaporator 22, performs heat exchange with the indoor air sucked by the fan 23 and cools the indoor air so as to be at a certain temperature.

Herein, condensate water is generated on the surface of the evaporator 22 while the indoor air is cooled.

The air conditioner includes a condensate water discharge unit (not

shown) for discharging condensate water generated in the operation to the outside, and a flow channel (not shown) is formed at a bottom region 14 of the casing 10 in order to make the condensate water flow from the indoor space region 21 to the outdoor space region 31 smoothly.

5 In more detail, the condensate water condensed on the surface of the evaporator 22 flows to the bottom region 14 of the casing 10 and flows to the outdoor space region 31 along the flow channel.

The condensate water gathered in the bottom region 14 of the outdoor space region 31 is generally discharged to the outside by the  
10 condensate water discharge unit (not shown), etc. However, part of the condensate water can be scattered onto the condenser 32 by a scattering unit (not shown), etc. additionally installed or installed at the end of a wing of the cooling fan 33 in order to cool the condenser 32 more efficiently.

In the meantime, the conventional single unit type air conditioner  
15 can be installed in any space, but, it is generally installed at a window. However, because of the structure, there is a limit to adjust a width or a height of the air conditioner while securing a certain cooling performance.

In more detail, in the conventional single unit type air conditioner, because it is installed at a window, installation conditions may be intricate,  
20 in addition, it may injure the view.

#### TECHNICAL GIST OF THE PESENT INVENTION

In order to solve the above-mentioned problems, it is an object of the present invention to provide an air conditioner that is capable of having

a structure adjustable a height freely.

In order to achieve the above-mentioned objects, it is another object of the present invention to provide an air conditioner that is capable of adjusting a height thereof freely and cooling a condenser more efficiently  
5 by using condensate water.

In order to achieve the above-mentioned objects, an air conditioner in accordance with the present invention includes a casing having an indoor space region and an outdoor space region; an indoor unit installed in the indoor space region, sucking air and cooling the sucked air through a  
10 first heat exchanger; an outdoor unit installed in the outdoor space region, sucking air and releasing heat to the outside through a second heat exchanger; and a turbo fan installed in the outdoor space region for generating air flow so as to make air flow in the outdoor unit.

#### 15 BRIEF DESCRIPTION OF DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles  
20 of the invention.

In the drawings:

Figure 1 is a longitudinal-sectional view illustrating the conventional single unit type air conditioner;

Figure 2 is a sectional view illustrating an air conditioner in

accordance with the present invention;

Figure 3 is a sectional view illustrating a section of the air conditioner in Figure 2 taken along a line III-III;

Figure 4 is a sectional view illustrating a section of the air  
5 conditioner in Figure 2 taken along a line IV-IV;

Figure 5 is a sectional view illustrating a section structure of a turbo fan of the air conditioner in Figure 2; and

Figure 6 is a conceptual view illustrating a structure of a bottom region of the air conditioner in Figure 2.

10

#### **DETAILED DESCRIPTION OF THE INVENTION**

Hereinafter, the preferred embodiment of an air conditioner in accordance with present invention will be described with reference to accompanying drawings.

15 As depicted in Figures 2 and 3, the air conditioner in accordance with present invention includes a casing 100 having an indoor space region 210 and an outdoor space region 310; an indoor unit 200 installed in the indoor space region 210, sucking air and cooling the sucked air through a first heat exchanger 220; an outdoor unit 300 installed in the outdoor space  
20 region 310, sucking air and releasing heat to the outside through a second heat exchanger 320; and a turbo fan 330 installed in the outdoor space region 310 for making air flow to the second heat exchanger 320.

The indoor space region 210 and the outdoor space region 310 are separately formed by a separation plate 110 installed in the casing 100.

In the indoor space region 210, a cross flow fan 230 for sucking the indoor air and making it pass the first heat exchanger 220 and an indoor guide portion 240 for guiding the indoor air flow are formed. And, a fan of any other type can be used as an apparatus for generating air flow in the indoor space region 210 besides a cross flow fan.

And, a driving motor 231 for driving the cross flow fan 230 is installed at a certain side of the indoor space region 210 of the casing 100. By installing the cross flow fan 230 in the indoor space region 210, a height of the air conditioner can be lowered.

The first heat exchanger 220 is an evaporator constructing a refrigerating cycle of the air conditioner in accordance with the present invention, the first heat exchanger 220 is installed at the front of the casing 100 in the direction of the indoor space region 210, and cools the indoor air by performing heat exchange between refrigerant passing the first heat exchanger 220 with the sucked indoor air.

And, a compressor 120 for compressing the refrigerant passed from the first heat exchanger 220 is installed at a side of the casing 100.

In the outdoor space region 310, an outdoor air guide portion 340 for sucking the outdoor air from the upper portion of the outdoor space region 310 of the casing 100, passing the sucked outdoor air through the second heat exchanger 320 installed at the side of the outdoor space region 310 and discharging the air to the outside is formed.

The second heat exchanger 320 performs a function of a condenser constructing the refrigeration cycle of the air conditioner in



accordance with the present invention. And the second heat exchanger 320 is installed at the side wall of the outdoor space region 310 and, when the outdoor air passes the second heat exchanger 320, heat of the refrigerant is released to the outside.

5           As depicted in Figures 4 and 5, the turbo fan 330 is installed on the outdoor air guide portion 340 perpendicular to a bottom region 140 of the casing 100 in the outdoor space region 310, and at the same time forms a part of the outdoor air guide portion 340.

          In more detail, the turbo fan 330 includes a suction portion 335  
10       connected to an outdoor air suction portion 341 formed at the upper portion of the outdoor space region 310; a discharge hole 332 formed toward the second heat exchanger 320; and a hub 333 connected to a rotational shaft of a driving motor 331 operated by the driving motor 331 fixedly installed at the bottom region 140 of the casing 100.

15           And, a scattering unit 350 is installed at the lower portion of the hub 333 of the turbo fan 330 in order to scatter condensate water gathered in the bottom region 140 to the second heat exchanger 320.

          The scattering unit 350 includes an extended portion 351 extended from the lower portion of the hub 333 toward the bottom region 140; and a  
20       scattering protrusion portion 352 projected from the outer circumference of the extended portion 351.

          The scattering protrusion portion 352 can be embodied in several forms without departing from the spirit or essential characteristics thereof, a plurality of scattering protrusion portions can be formed on the outer

circumference of the extended portion, or a ring-shaped scattering protrusion portion can be formed.

A scattering guide portion 353 is formed at the bottom region 140 in the outdoor space region 310 in order to make condensate water gathered around the extended portion 351 of the scattering unit 350 be scattered to the second heat exchanger 320 more efficiently.

The scattering guide portion 353 is formed at the outer circumference of the scattering unit 350 at which the second heat exchanger 320 is installed so as to be inclined from the bottom region 140, and the scattering guide portion 353 has an arc shape.

In the meantime, a motor protecting member 354 is extended-installed at the bottom region 140 in order to protect the driving motor 331 from the condensate water scattered by the scattering unit 350 or prevent the condensate water from flowing towards the driving motor 331.

In addition, a condensate water flow path 141 is formed at the bottom region 140 in order to make the condensate water flow from the indoor space region 20 to the outdoor space region 310. In order to improve a scattering efficiency, a plurality of inclined portions 142 are formed at the bottom region 140 in the outdoor space region 310 so as to make more condensate water gather in a portion corresponded to the scattering unit 350.

In the above-described structure, the more condensate water stays in the scattering unit 350 by the bottom region 140, and the larger amount of condensate water is scattered to the second heat exchanger 320.

Arrows in Figure 6 show flows of the condensate water.

The large amount of condensate water is scattered to the outdoor space region 310 by the scattering unit 350, herein, a scattering preventive unit 143 for protecting the indoor space region 210 from the scattered  
5 condensate water can be installed.

The operation of the air conditioner in accordance with the present invention will be described in more detail. Herein, general operations will be abridged for convenience.

In the operation of the air conditioner in accordance with the  
10 present invention, condensate water is formed in the first heat exchanger 2, the condensate water flows along the condensate water flow channel 141 and stays in the bottom region 140 of the outdoor space region 310.

The turbo fan 330 sucks the outdoor air while being rotated by the driving motor 331 and makes it pass the second heat exchanger 320  
15 continuously. In that process, the scattering unit 350 installed at the hub 333 of the turbo fan 330 scatters the stayed condensate water.

In more detail, when the condensate water is scattered by the scattering protrusion portion 352 of the scattering unit 350, the condensate water can be evenly scattered to the second heat exchanger 320 by the  
20 scattering guide portion 353 with the air flow formed by the turbo fan 330.

The condensate water scattered on the surface of the second heat exchanger 320 is evaporated with the flow of the outdoor air, in that process, the second heat exchanger 320 is cooled, and accordingly heat of the refrigerant flowing in the second heat exchanger 320 is released to the

outside.

As the present invention may be embodied in several forms without departing from the spirit or essential characteristics thereof, it should also be understood that the above-described embodiments are not limited by  
5 any of the details of the foregoing description, unless otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the metes and bounds of the claims, or equivalence of such metes and bounds are therefore intended to be  
10 embraced by the appended claims.

In particular, it is also possible to use a structure of an outdoor unit in accordance with the present invention for an air conditioner having an indoor unit and an outdoor unit separately.

#### INDUSTRIAL APPLICABILITY

15 In an air conditioner in accordance with the present invention, by arranging a turbo fan installed so as to be perpendicular to a bottom region of a casing in an outdoor unit, it is possible to reduce noise in operation of the air conditioner and adjust a height of the outdoor unit freely, and accordingly it is possible to improve the view of a single unit type air  
20 conditioner which is installed at a window.

In addition, in an air conditioner in accordance with the present invention, by using a turbo fan for an outdoor unit and installing a scattering unit for scattering condensate water to a condenser/outdoor heat

exchanger, the condenser can be cooled more efficiently, and accordingly it is possible to improve an efficiency of the air conditioner.

### CLAIMS

1. An air conditioner, comprising:
  - a casing having an indoor space region and an outdoor space
  - 5 region;
  - an indoor unit installed in the indoor space region, sucking air and cooling the sucked air through a first heat exchanger;
  - an outdoor unit installed in the outdoor space region, sucking air and releasing heat of the air to the outside through a second heat
  - 10 exchanger; and
  - a turbo fan installed in the outdoor space region for generating air flows so as to flow air to the second heat exchanger.
2. The air conditioner of claim 1, wherein the casing includes
- 15 a bottom region formed so as to make condensate water formed in the first heat exchanger flow to the outdoor space region, the turbo fan is installed perpendicular to the bottom region, and a hub having a scattering unit for scattering condensate water gathered in the bottom region to the second heat exchanger is further included.
- 20
3. The air conditioner of claim 2, wherein the scattering unit includes:
  - an extended portion extended from the lower portion of the hub toward the bottom region; and

a scattering protrusion portion projected from the outer circumference of the extended portion.

4. The air conditioner of claim 3, wherein there are a plurality  
5 of scattering protrusion portions.

5. The air conditioner of claim 3, wherein a scattering guide  
portion is formed around the extended portion of the scattering unit in the  
bottom region in order to make the condensate water be scattered to the  
10 second heat exchanger more efficiently.

6. The air conditioner of claim 2, wherein a motor protecting  
member is extended-formed in the bottom region in order to protect a  
motor for driving the turbo fan from the scattered condensate water.

15

7. The air conditioner of claim 3, wherein a plurality of  
inclined portions are formed so as to be corresponded to the extended  
portion of the scattering unit in the bottom region in order to make the  
condensate water gather in the scattering unit installation portion.

20

8. The air conditioner of claim 2, wherein a scattering  
preventive portion is installed at part of the exterior of the scattering unit in  
order to prevent the condensate water from being scattered to the indoor  
space region.

9. The air conditioner of claim 1, wherein a cross flow fan is installed in the indoor space region.

5



**BIRCH, STEWART, KOLASCH & BIRCH, LLP**P.O. Box 747 • Falls Church, Virginia 22040-0747  
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT AND DESIGN APPLICATIONS**

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Insert Title:

AIR CONDITIONER

Fill in Appropriate

the specification of which is attached hereto. If not attached hereto, the application is identified by the attorney docket number as set forth above and/or the following:

Information -  
For Use Without  
Specification  
Attached:

The specification was filed on \_\_\_\_\_ as  
United States Application Number \_\_\_\_\_;  
and amended on \_\_\_\_\_ (if applicable) and/or  
the specification was filed on December 18, 2002 as PCT  
International Application Number PCT/KR2002/002385; and was  
amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Insert Priority  
Information:  
(if appropriate)

Prior Foreign Application(s)			Priority Claimed	
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional applications(s) listed below.

Insert Provisional  
Application(s):  
(if any)

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Insert Requested  
Information:  
(if appropriate)

Country	Application Number	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s), including for continuation-in-part application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Insert Prior U.S.  
Application(s):  
(if any)

_____ (Application Number)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)
_____ (Application Number)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)

I hereby appoint the practitioners at CUSTOMER NO. 02292 as my attorneys or agents to prosecute this application and/or an international application based on this application and to transact all business in the United States Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the practitioners, unless the inventor(s) or assignee provides said practitioners with a written notice to the contrary:

Send Correspondence to:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP** or CUSTOMER NO. 02292  
P.O. Box 747 • Falls Church, Virginia 22040-0747  
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:  
YOU MUST  
COMPLETE  
THE  
FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First  
or Sole Inventor:  
Insert Name of  
Inventor  
Insert Date This  
Document is Signed

Insert Residence  
Insert Citizenship

Insert Post Office  
Address

Full Name of Second  
Inventor, if any:  
see above

Full Name of Third  
Inventor, if any:  
see above

Full Name of Fourth  
Inventor, if any:  
see above


Full Name of Fifth  
Inventor, if any:  
see above

Full Name of Sixth  
Inventor, if any:  
see above

GIVEN NAME/FAMILY NAME Dae-Hwan CHOI	INVENTOR'S SIGNATURE <i>Dae-Hwan</i>	DATE* 2005.6.13
Residence (City, State & Country) Busan, Korea		CITIZENSHIP Republic of Korea
MAILING ADDRESS (Complete Street Address including City, State & Country) Hwamyongjugong Apt. 37-210, Hwamyong-Dong, Buk-Gu, 616-783 Busan, Korea		
GIVEN NAME/FAMILY NAME Kyungsoo LEE	INVENTOR'S SIGNATURE <i>Kyungsoo</i>	DATE* JUNE 13, 2005
Residence (City, State & Country) Busan, Korea		CITIZENSHIP Republic of Korea
MAILING ADDRESS (Complete Street Address including City, State & Country) 705-17, Sujeong 3-Dong, Dong-Gu, 601-817 Busan, Korea		
GIVEN NAME/FAMILY NAME Yoon-Seob EOM	INVENTOR'S SIGNATURE <i>Yoon</i>	DATE* 2005.6.13
Residence (City, State & Country) Changwon, Gyeongsangnam-Do, Korea		CITIZENSHIP Republic of Korea
MAILING ADDRESS (Complete Street Address including City, State & Country) Wooseong Apt. 101-1006, Namyang-Dong, 641-091 Changwon, Gyeongsangnam-Do, Korea		
GIVEN NAME/FAMILY NAME Jeong-Hwan KOO	INVENTOR'S SIGNATURE <i>Hwan</i>	DATE* 2005.6.13
Residence (City, State & Country) Busan, Korea		CITIZENSHIP Republic of Korea
MAILING ADDRESS (Complete Street Address including City, State & Country) 1346-22, 18/4, Daeyeon 5-Dong, Nam-Gu, 608-808 Busan, Korea		
GIVEN NAME/FAMILY NAME Jun-Sang RYU	INVENTOR'S SIGNATURE <i>RYU</i>	DATE* 2005.6.13
Residence (City, State & Country) Goyang, Gyeonggi-Do, Korea		CITIZENSHIP Republic of Korea
MAILING ADDRESS (Complete Street Address including City, State & Country) Hanil Apt. 505-1101, Juyeop 2-Dong, Ilsan-Gu, 411-372 Goyang, Gyeonggi-Do, Korea		
GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)	CITIZENSHIP	
MAILING ADDRESS (Complete Street Address including City, State & Country)		

1/4

FIG. 1

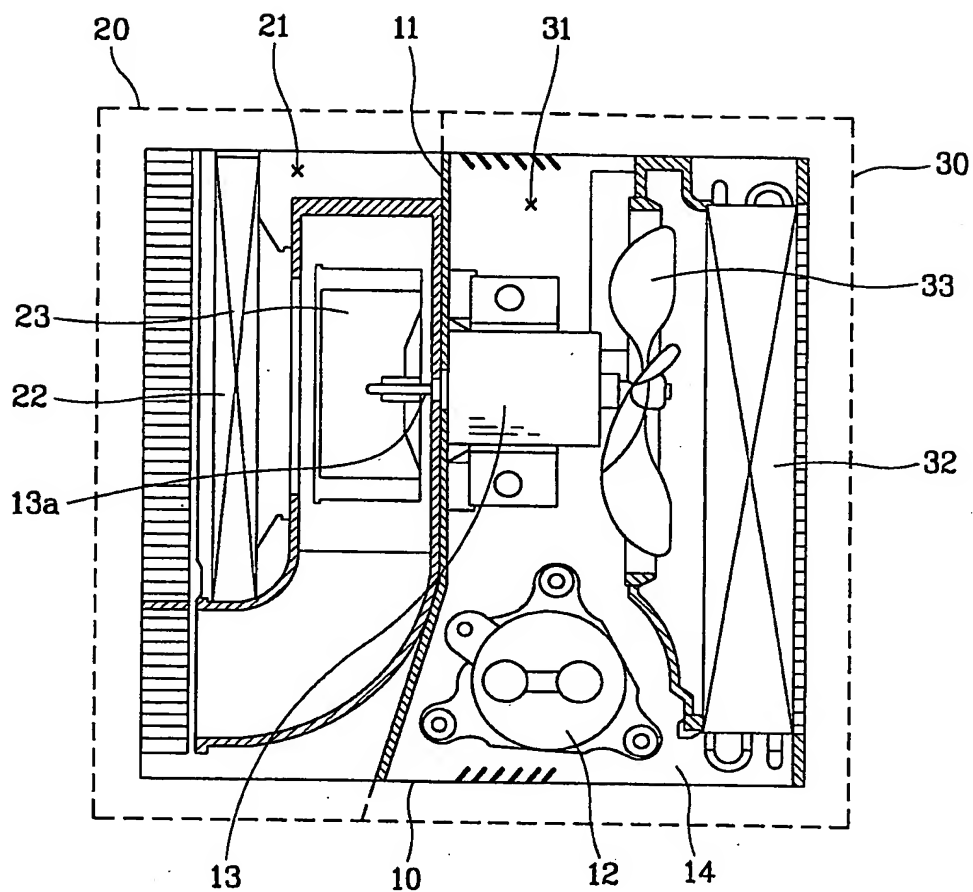

10/539554

2/4

FIG. 2


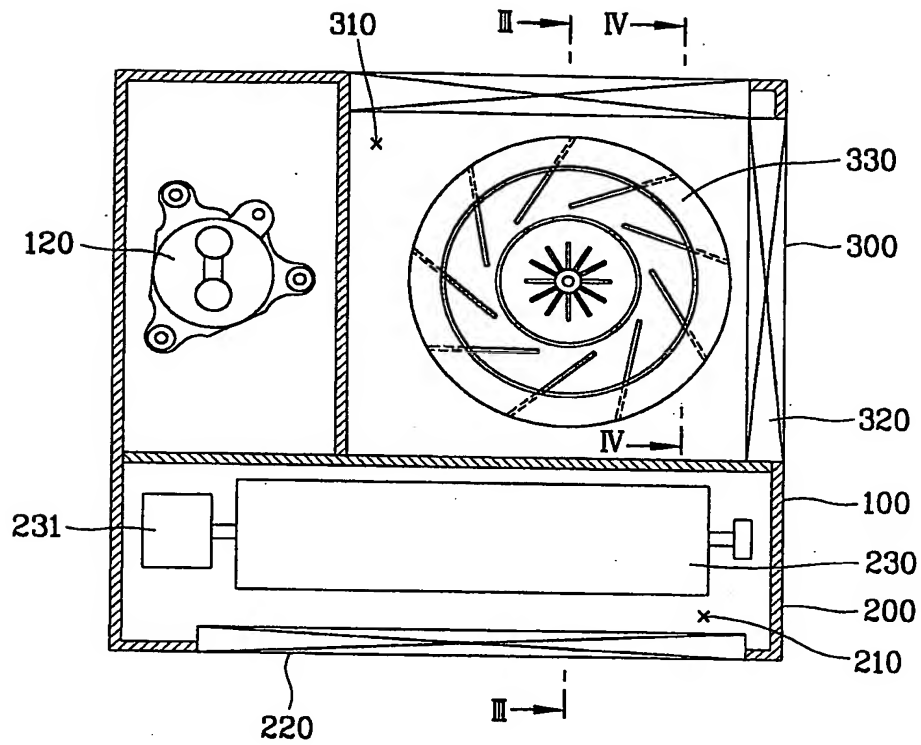


FIG. 3

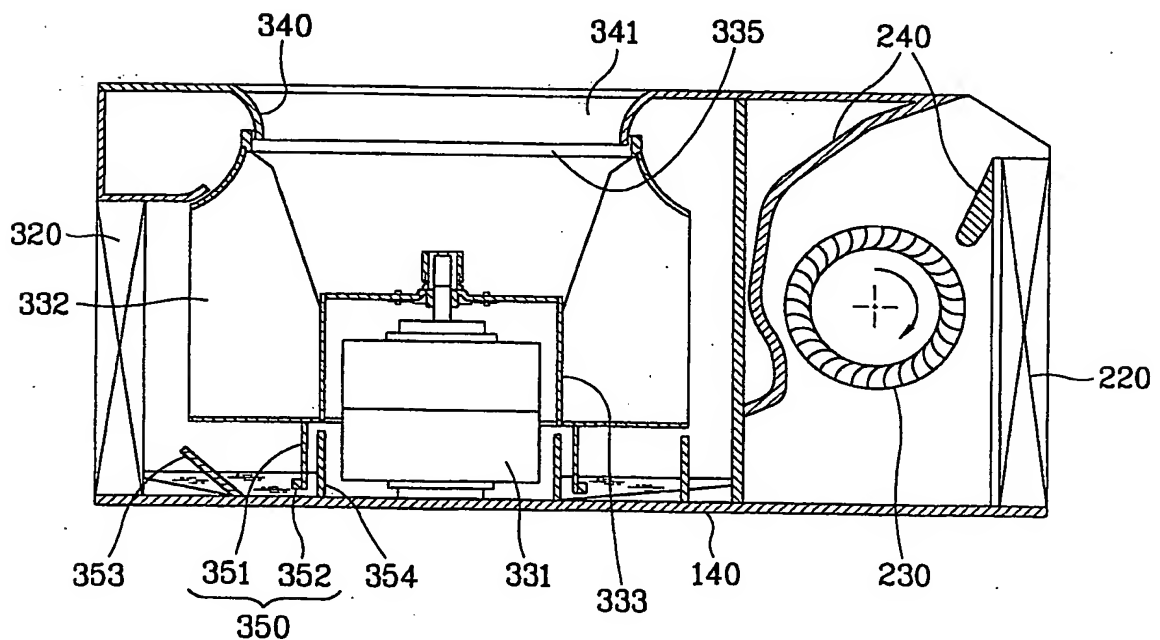

10/539554

3/4  
FIG. 4


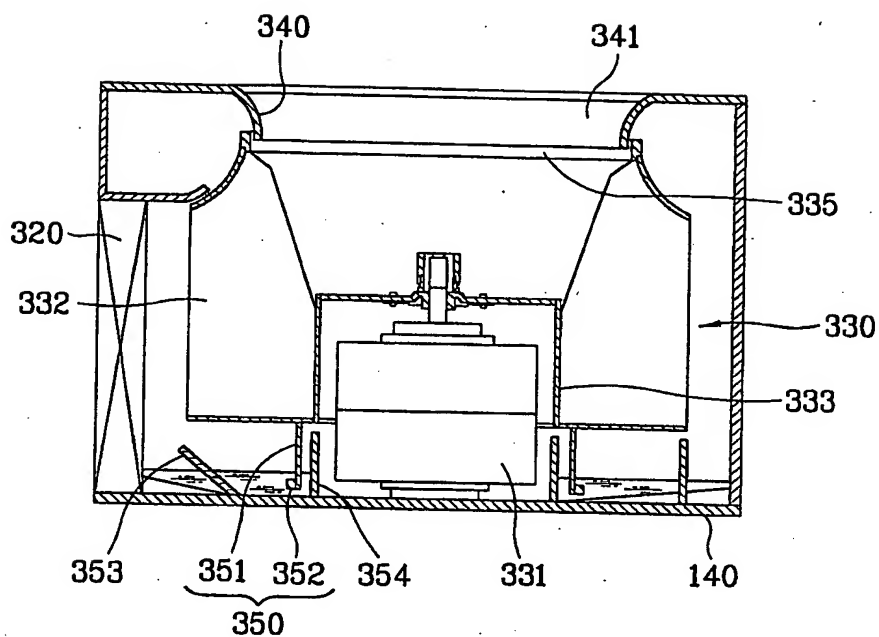


FIG. 5



10/539554

4/4  
FIG. 6

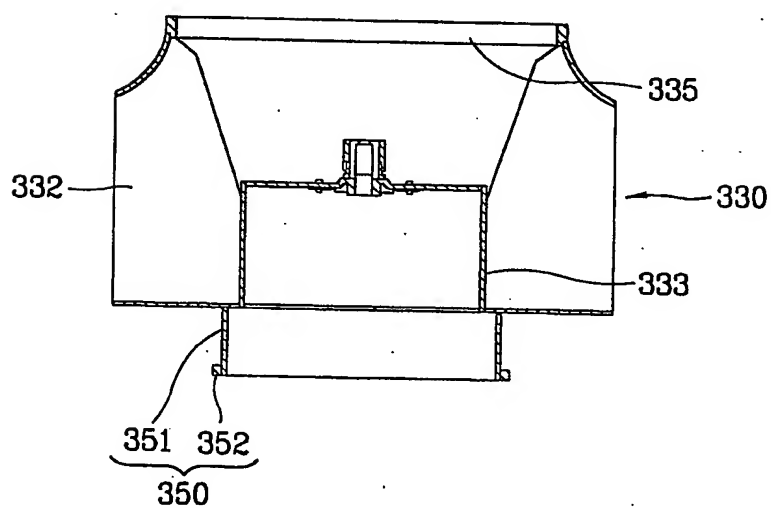